

CHEMICAL COMPOSITION

C	Cr	Mo	W	Co	V
1.28	4.1	5.0	6.4	-	3.1

SAFETY DATA SHEET SDS: A

STANDARDS

- Europe: HS 6-5-3C
- Germany: 1.3395
- USA: AISI M3:2
- Sweden: SS 2725
- Japan: JIS SKH53

DELIVERY HARDNESS

- Typical soft annealed hardness is 260 HB
- Cold drawn and cold rolled material is typically 10-40 HB harder

DESCRIPTION

ASP[®]2023 is a non cobalt grade for high performance cutting tools, cold work tools and rolls for cold rolling.

APPLICATIONS

- Gear cutting tools
- Broaches
- Taps
- Cold work
- Rolls
- Knives
- Plastic injection

FORM SUPPLIED


- Coils
- Round bars
- Flat & square bars
- Strips
- Sheets
- Discs

Available surface conditions: drawn, ground, peeled, rough machined, cold rolled, hot rolled.

HEAT TREATMENT

- Soft annealing in a protective atmosphere at 850-900°C for 3 hours, followed by slow cooling at 10°C/h down to 700°C, then air cooling.
- Stress-relieving at 600-700°C for approximately 2 hours, slow cooling down to 500°C.
- Hardening in a protective atmosphere with preheating in 2 steps at 450-500°C and 850-900°C and austenitising at a temperature suitable for chosen working hardness. Cooling down to 40-50°C.
- Tempering at 560°C three times for at least 1 hour each time. Cooling to room temperature (25°C) between temperings.

GUIDELINES FOR HARDENING

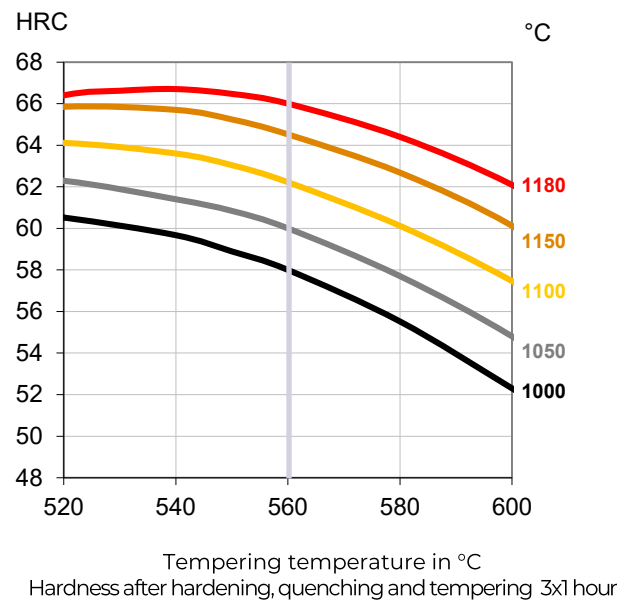

PROCESSING

ASP[®]2023 can be worked as follows:

- machining (grinding, turning, milling)
- polishing
- hot forming
- electrical discharge machining
- welding (special procedure including preheating and filler materials of base material composition).

GRINDING

During grinding, local heating of the surface, which may alter the temper, must be avoided. Grinding wheel manufacturers can provide advice on the choice of grinding wheels.

SURFACE TREATMENT

The steel grade is a perfect substrate material for PVD coating. If nitriding is requested, a small diffusion zone is recommended but avoid compound and oxidized layers.

PROPERTIES


PHYSICAL PROPERTIES

Temperature	20°C	400°C	600°C
Density g /cm ³ (1)	8.0	7.9	7.9
Modulus of elasticity kN/mm ² (2)	230	205	184
Thermal expansion ratio per °C (2)	-	12.1x10 ⁻⁶	12.7x10 ⁻⁶
Thermal conductivity W/m°C (2)	24	28	27
Specific heat J/kg °C (2)	420	510	600

(1)=Soft annealed


(2)=Hardened 1180°C and tempered 560°C, 3x1 hour

CCT CURVE

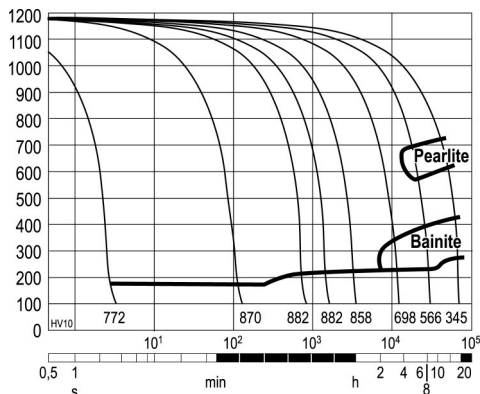


Continuous cooling transformation curve
Hardening Temperature 1180°C

COMPRESSION YIELD STRESS

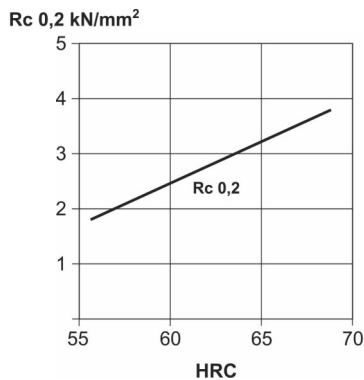

IMPACT TOUGHNESS

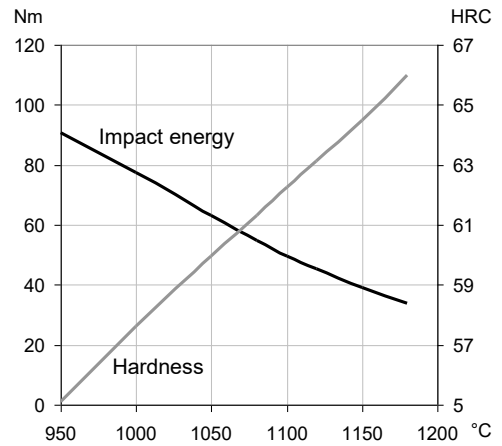


Hardening temperature in °C

Original dimension 9 x 12 mm

Tempering 3 x 1 hour at 560° C

Unnotched test piece 7 x 10 x 55 mm

4-POINT BEND STRENGTH

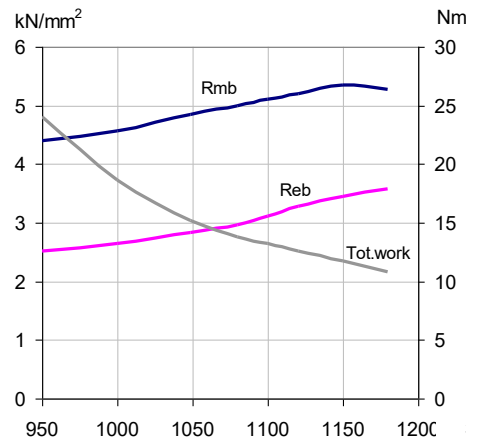

Hardening Temperature in °C

Original dimension Ø 6 mm

Tempering 3 x 1 hour at 560° C

Dimension of test piece Ø 4.7 mm

Rmb = Ultimate bend strength in kN/mm²

Reb = Bend yield strength in kN/mm²

Tot. work = Total work in Nm

COMPARATIVE PROPERTIES

